

Jarrett

Product Info

F19001CW

500KG GALVANISED BACKSAVER CRANE WITH EXTENDED BOOM

Backsaver Crane:


- Max extended height = 1950 vertical 1450 horizontal at 350kg S.W.L
- Min extended height = 1530 vertical 1700 horizontal at 280kg S.W.L
- Max retracted height = 1640 vertical 1060 horizontal at 500kg S.W.L
- Min retracted height = 1330 vertical 1270 horizontal at 400kg S.W.L
- Vertical storage height = 2300

8000 Series Brake Winch as supplied:


Model : F18260
 Gear Ratio: 10:1
 Application: Lifting
 Rated Capacity: 500kg (4900N)
 Mass (Winch only): 6kg
 Type of Brake: Self Actuating
 Drum Diameter: 50mm
 Flange Diameter: 130mm
 Drum Width: 52mm
 Cable size: Ø6mm
 Maximum Cable Capacity: 12m x Ø6mm
 Max. Effort on handle at Rated Load: 18kg
 Cable Breaking Strain: 2712kg
 Cable (Galv) as supplied: 7.5m x Ø6mm
 Fastening Device: Snap Hook

Notes:

- Recommended for lifting applications.
- Webbing cannot be used on these winches.
- Self actuating brake requires a minimum of 18kg to operate safely.
- Jarrett Winches and Cranes are not designed for the movement of people.

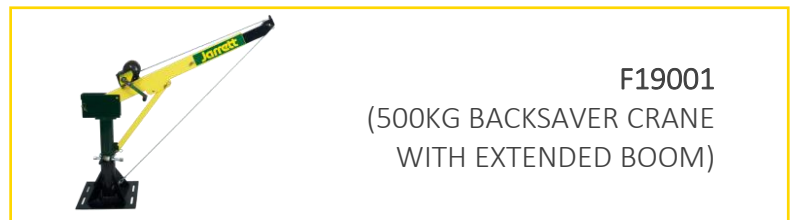

F19001
(500KG BACKSAVER CRANE WITH EXTENDED BOOM)

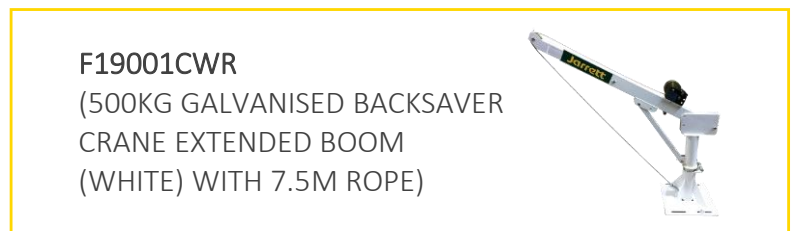

F19001CWR
(500KG GALVANISED BACKSAVER CRANE EXTENDED BOOM (WHITE) WITH 7.5M ROPE)



F19001R
(500KG GALVANISED BACKSAVER CRANE EXTENDED BOOM WITH 7.5M ROPE)